



SURE STAR COMPUTER CO., LTD 添誠資訊股份有限公司
<http://www.surestar.com.tw> Tel:+886 2 2682 2505
E-mail:info@surestar.com.tw Fax:+886 2 2682 2515
NO.2-1, DAAN ROAD, SHULIN .DIST., NEW TAIPEI CITY 238, TAIWAN

SPECIFICATION

Model Name :

TC1GPS11Y *series*

Description :

400W 、 500W 、 600W 1U Single Power Supply

Version : A0

Issued Date : 20240305



1. General Description

This specification defines the characteristic of single power supply with 1 Unit high.
And **SURE STAR** model name is TC1GPS11Y401 for 400W、TC1GPS11Y501 for 500W、
TC1GPS11Y601 for 600W output.

2. Input Characteristic

2.1. Input connector

The input connector shall be an IEC60320 C14 inlet, rated for 10A/250Vac.

2.2. Input Voltage and Frequency

Minimum	Nominal	Maximum	Measure
90	100~240	264	Vac
47	50~60	63	Hz

2.3. Input Current and Inrush Current

Input Voltage	MAX. Input Current	Inrush Current
115Vac	6.5A/6.5A/7A	25A
230Vac	3.5A	50A

2.4. Power Factor

The minimum power factor shall be 0.95 with full load and input 230Vac/50Hz.

3. Output Characteristic

3.1. DC Output Characteristic

Output Voltage	Min. Current	Max. Current	Regulation	Ripple & Noise
+3.3V	0.1A	15A	±5%	50mV
+5V	0.1A	15A	±5%	50mV
+12V	0.1A	32A/40A/48A	±5%	120mV
-12V	0A	0.5A	±10%	120mV
+5VSB	0A	3A	±5%	50mV

Note :

1. The combined power from +3.3V and +5V shall not exceed 80W.
2. The max total power shall not exceed 400W/500W/600W.
3. Ripple and noise bandwidth is set to 20MHz.
4. Add a 0.1uF ceramic capacitor in parallel with a 10uF tantalum capacitor at output connector terminals for ripple and noise measurement.



3.2. Efficiency

The power efficiency shall meet 80plus GOLD 115Vac/60Hz input.

3.3. Hold up Time

The output voltages stay in regulation at least 18ms with 75% load after loss of AC input.

3.4. Rise Time

The output voltages rise from 10% to 90% with full load shall be in 20ms maximum.

3.5. Dynamic Loading

The output voltages shall remain in regulation for the step loading, and in the limits for the capacitive loading specified below :

<i>Output</i>	<i>Step Load Size</i>	<i>Load Slew Rate</i>	<i>Capacitive Load</i>
+3.3V	30% of max load	0.5A / μ sec	1000uF
+5V	30% of max load	0.5A / μ sec	1000uF
+12V	65% of max load	0.5A / μ sec	2200uF
+5VSB	25% of max load	0.5A / μ sec	1uF

3.6. PSON Remote on/off Control

The PSON signal is required to remotely turn on/off the power supply.

PSON is an active low TTL compatible signal that turns on the main power rails.

	<i>PSU On</i>	<i>PSU Off</i>
PSON Signal	LOW (0.8V max.)	HI (2V min.)

3.7. Power Good Signal

Power Good, also called PG or PWOK, is an active high TTL compatible signal.

PG signal is to indicate that all output voltages are in regulation and ready for use.

Below is for a representation of the timing characteristics of PG signal.

Power Good on delay time	100ms to 500ms
Power Good off delay time	1ms (min.)



4. Protection

4.1. Over Current Protection

<i>Output</i>	<i>Min.</i>	<i>Max.</i>	<i>Comment</i>
+3.3V	110%	150%	PSU shutdown
+5V	110%	150%	PSU shutdown
+12V	110%	150%	PSU shutdown

4.2. Over Voltage Protection

<i>Output</i>	<i>Min.</i>	<i>Max.</i>	<i>Comment</i>
+3.3V	3.7V	4.1V	PSU shutdown
+5V	5.7V	6.5V	PSU shutdown
+12V	13.1V	14.5V	PSU shutdown

4.3. Short Circuit Protection

<i>Output</i>	<i>Comment</i>
+3.3V	PSU shutdown
+5V	PSU shutdown
+12V	PSU shutdown

4.4. Over Temperature Protection

The power supply would be protected against over temperature condition by loss of cooling or excessive ambient temperature. The PSU will shutdown in an OTP condition.



SURE STAR COMPUTER CO., LTD 添誠資訊股份有限公司
http://www.surestar.com.tw Tel:+886 2 2682 2505
E-mail:info@surestar.com.tw Fax:+886 2 2682 2515
NO.2-1, DAAN ROAD, SHULIN .DIST., NEW TAIPEI CITY 238, TAIWAN

5. Insulation

5.1. Dielectric Withstand Voltage

Primary to Ground	1500Vac (10mA) for 1 second
-------------------	-----------------------------

5.2. Leakage Current

Leakage current is 3.5mA maximum at 240Vac/50Hz.

6. Safety

CB、CE、TUV、UL、BSMI、CCC。

Please visit our website and get the latest safety certificate.

7. EMC

CE、FCC、BSMI、CCC。(Class B)

Please visit our website and get the latest EMC certificate.

8. Environmental Requirement

8.1. Temperature

Operating : 0°C to +50°C.

Non-Operating : -20°C to +70°C.

8.2. Humidity

Operating : 20% to 90% , non-condensing.

Non-Operating : 5% to 95% , non-condensing.

8.3. Altitude

Operating : Up to 5000m.

8.4. Cooling Method

By DC fan.

9. Reliability

9.1. MTBF

Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C.



SURE STAR COMPUTER CO., LTD 添誠資訊股份有限公司


http://www.surestar.com.tw Tel:+886 2 2682 2505

E-mail:info@surestar.com.tw Fax:+886 2 2682 2515

NO.2-1, DAAN ROAD, SHULIN .DIST., NEW TAIPEI CITY 238, TAIWAN

10. Mechanical Drawing and Output Wire

10.1. Outline (bracket optional) : W100 * H040.5 * D200mm.

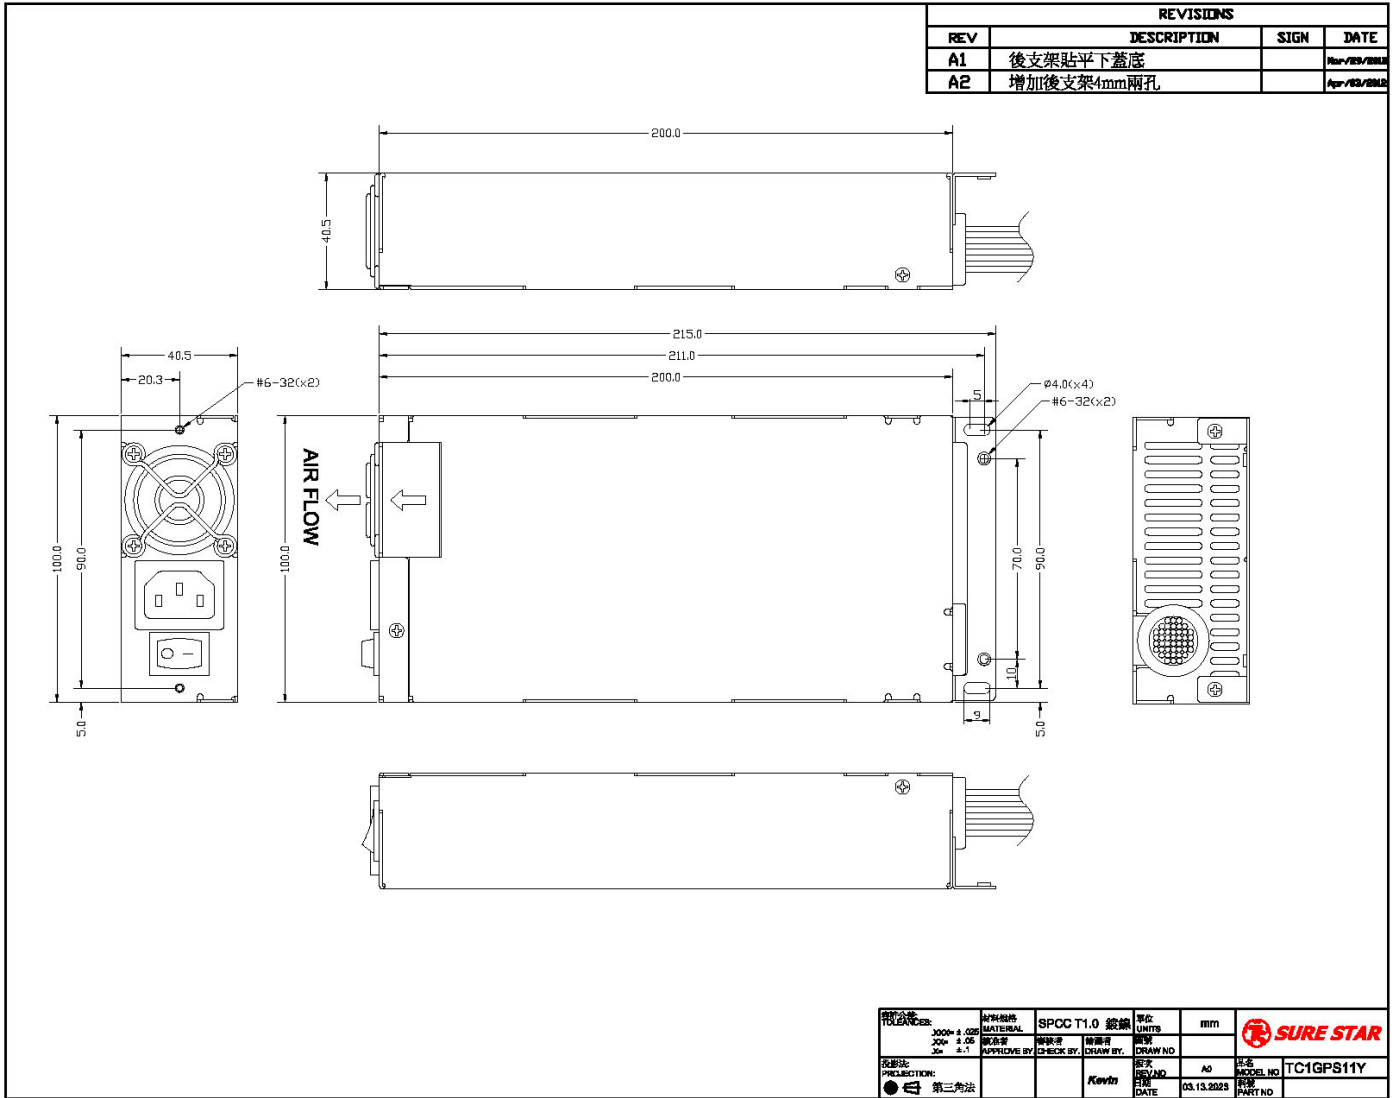



10.2. Output Wire (could be customization) :

The diagram illustrates various output wire configurations for different connector types. Each configuration includes a main cable with a length of $L=500\text{mm}\pm 20\text{mm}$ and a shorter branch cable with a length of $L=150\text{mm}\pm 10\text{mm}$. The main cable length is also specified as $L=100\text{mm}$ for some configurations. The configurations are as follows:

- P24:** 20+4Pin (EP812V) HOUSING: MOLEX 6557 series or equivalent. TERMINAL: MOLEX 5559 series or equivalent. Pin 1-12 are labeled with colors and lengths.
- P4A:** 4Pin+4Pin (ATX12V FOR P4) HOUSING: MOLEX 5559 series or equivalent. TERMINAL: MOLEX 5559 series or equivalent. Pin 1-4 are labeled with colors and lengths.
- P4B:** 4Pin+4Pin (ATX12V FOR P4) HOUSING: MOLEX 5559 series or equivalent. TERMINAL: MOLEX 5559 series or equivalent. Pin 1-4 are labeled with colors and lengths.
- P2:** 2Pin HOUSING: MOLEX 5559 series or equivalent. TERMINAL: MOLEX 5559 series or equivalent. Pin 1-2 are labeled with colors and lengths.
- P6:** 6Pin HOUSING: MOLEX 5559 series or equivalent. TERMINAL: MOLEX 5559 series or equivalent. Pin 1-6 are labeled with colors and lengths.
- P4H1-P4H7:** 4Pin+4Pin (ATX12V FOR P4) HOUSING: MOLEX 4559 series or equivalent. TERMINAL: MOLEX 5559 series or equivalent. Pin 1-4 are labeled with colors and lengths.
- S1-S3:** SATA HDD HOUSING: MOLEX 67582 series or equivalent. TERMINAL: MOLEX 67581 series or equivalent. Pin 1-5 are labeled with colors and lengths.

VERSIONS			
VER	DESCRIPTION	SIGN	DATE
			///

Housing No.	Pin No.	WIRE COLOR	LENGTH	Pin No.	WIRE COLOR	LENGTH
P24	1	ORANGE(+3V)	300mm±18AWG	13	ORANGE(+3V)	300mm±18AWG
	2	ORANGE(+3V)	300mm±18AWG	14	BLACK(-5V)	300mm±18AWG
	3	BLACK(-5V)	300mm±18AWG	15	BLACK(-5V)	300mm±18AWG
	4	RED(+5V)	300mm±18AWG	16	ORANGE(+3V)	300mm±18AWG
	5	BLACK(-5V)	300mm±18AWG	17	BLACK(-5V)	300mm±18AWG
	6	RED(+5V)	300mm±18AWG	18	BLACK(-5V)	300mm±18AWG
	7	BLACK(-5V)	300mm±18AWG	19	BLACK(-5V)	300mm±18AWG
	8	GRAY(+5V)	300mm±18AWG	20	NC	300mm±18AWG
	9	PURPLE(+5V)	300mm±18AWG	21	RED(+5V)	300mm±18AWG
	10	YELLOW(+12V)	300mm±18AWG	22	RED(+5V)	300mm±18AWG
	11	YELLOW(+12V)	300mm±18AWG	23	RED(+5V)	300mm±18AWG
	12	ORANGE(+3V)	300mm±18AWG	24	BLACK(-5V)	300mm±18AWG

Housing No.	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P4A	1	BLACK/BLACK	COM	18AWG	500mm±20mm
	2	BLACK/BLACK	COM	18AWG	
	3	YELLOW/YELLOW	+12V	18AWG	
	4	YELLOW/YELLOW	+12V	18AWG	
P4B	1	BLACK	COM	20AWG	150mm±10mm
	2	BLACK	COM	20AWG	
	3	YELLOW	+12V	20AWG	
	4	YELLOW	+12V	20AWG	

Housing No.	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P6	1	YELLOW	+12V	18AWG	500mm±20mm
	2	YELLOW	+12V	18AWG	
	3	YELLOW	+12V	18AWG	
	4	BLACK	COM	18AWG	
	5	BLACK	COM	18AWG	
	6	BLACK/BLACK	COM	18AWG	
	7	BLACK/BLACK	COM	18AWG	
	8	BLACK	COM	20AWG	

Housing No.	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P2	4	BLACK	COM	20AWG	100mm±10mm
	5	BLACK	COM	20AWG	
	6	BLACK	COM	20AWG	
	8	BLACK	COM	20AWG	

Housing No.	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
P4H1	1	YELLOW	+12V	18AWG	500mm ±20mm
	2	BLACK/BLACK	COM	18AWG	
	3	BLACK/BLACK	COM	18AWG	
	4	RED/RED	+5V	18AWG	
P4H2	1	YELLOW	+12V	18AWG	150mm ±10mm
	2	BLACK/BLACK	COM	18AWG	
	3	BLACK/BLACK	COM	18AWG	
	4	RED/RED	+5V	18AWG	
P4H3	1	YELLOW	+12V	18AWG	150mm ±10mm
	2	BLACK/BLACK	COM	18AWG	
	3	BLACK/BLACK	COM	18AWG	
	4	RED/RED	+5V	18AWG	
P4H4	1	YELLOW	+12V	18AWG	150mm ±10mm
	2	BLACK/BLACK	COM	18AWG	
	3	BLACK/BLACK	COM	18AWG	
	4	RED/RED	+5V	18AWG	
P4H5	1	YELLOW	+12V	18AWG	500mm ±20mm
	2	BLACK/BLACK	COM	18AWG	
	3	BLACK/BLACK	COM	18AWG	
	4	RED/RED	+5V	18AWG	
P4H6	1	YELLOW	+12V	18AWG	150mm ±10mm
	2	BLACK/BLACK	COM	18AWG	
	3	BLACK/BLACK	COM	18AWG	
	4	RED/RED	+5V	18AWG	
P4H7	1	YELLOW	+12V	18AWG	150mm ±10mm
	2	BLACK	COM	18AWG	
	3	BLACK	COM	18AWG	
	4	RED	+5V	18AWG	

Housing No.	Pin No.	WIRE COLOR	SIGNAL	WIRE TYPE	LENGTH
S1	1	ORANGE /	+3.3V	18AWG	500mm ±20mm
	2	BLACK	COM	18AWG	
	3	RED/RED	+5V	18AWG	
	4	BLACK /	COM	18AWG	
	5	YELLOW /	+12V	18AWG	
S2	1	ORANGE /	+3.3V	18AWG	150mm ±10mm
	2	BLACK	COM	18AWG	
	3	RED/RED	+5V	18AWG	
	4	BLACK /	COM	18AWG	
	5	YELLOW /	+12V	18AWG	
S3	1	ORANGE	+3.3V	18AWG	150mm ±10mm
	2	BLACK	COM	18AWG	
	3	RED	+5V	18AWG	
	4	BLACK	COM	18AWG	
	5	YELLOW	+12V	18AWG	

規格書 TOLERANCE	20%	材料規格 MATERIAL	2	單位 mm	
圖面 PRELIMINATION	3%	審核 APPROVE BY	3	日期 DATE	
圖面 PRELIMINATION	3%	審核 APPROVE BY	3	日期 DATE	圖面 NO. TC1GPS 日期 DATE 2023.03.13 圖面 NO.



SURE STAR COMPUTER CO., LTD 添誠資訊股份有限公司
<http://www.surestar.com.tw> Tel:+886 2 2682 2505
E-mail:info@surestar.com.tw Fax:+886 2 2682 2515
NO.2-1, DAAN ROAD, SHULIN .DIST., NEW TAIPEI CITY 238, TAIWAN

11. Customization Note

Customization note shall be listed here.

End of File

NOTE : This data is subject to change without notice.